

Seamless and Secure Access (SSA) Manual Configuration Guide

for Nokia S60 3rd Edition & above



1 Connect to Wireless@SG via SSA

1.1 Create a Wireless@SGx profile

- a) Go to **Menu** → **Tools** → **Settings** → **Connections** → **Access Points**
- b) Click on **Options** → **New Access Point**
- c) Enter the **Connection name** as “Wireless@SGx”
- d) Set **Data bearer** to “Wireless LAN”
- e) Set **WLAN netw. name** to “Wireless@SGx”
- f) Set **Network status** to “Public”




- g) Set **WLAN netw. mode** to “Infrastructure”
- h) Change **WLAN security mode** to “802.1x”
- i) Click on **WLAN security settings**




- j) Set **WPA/WPA2** to “EAP”
- k) Click on **EAP plug-in settings**



- l) Click on **Options** → **Enable** for EAP-PEAP and Disable for all others

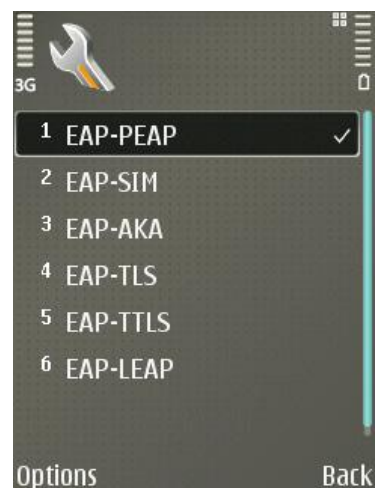

- m) Highlight **EAP-PEAP**
n) Click **Options** → **Configure**
Alternatively, on certain models,
Click **Options** → **Edit**

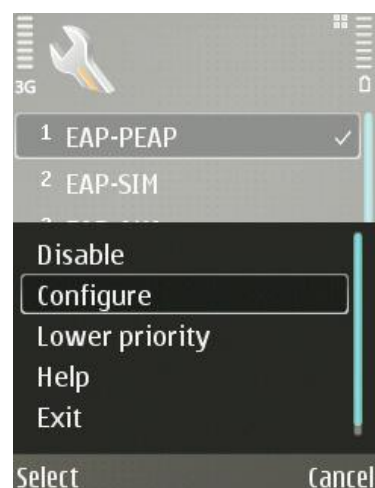


- o) Leave **User / Personal certificate** as “(not defined)”
p) Change **CA certificate / Authority certificate** to “GoDaddy Class 2”
q) Change **User name in use** and **Realm in use** to “User-configured”
r) Enter your Wireless@SG username followed by @domain. Leave the rest of the settings as default




- s) Press the right arrow to move to the **EAP** tab
- t) Click on **Options** → **Enable** for EAP-MSCHAPv2 and Disable for all others



- u) Highlight **EAP-MSCHAPv2**
- v) Click **Options** → **Configure**
Alternatively, on certain models, Click **Options** → **Edit**

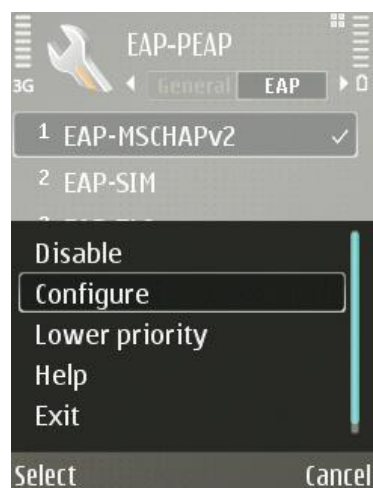

- w) Enter your Wireless@SG username login ID followed by “@domain” in **User name** field
- x) Change **Prompt password** to “No”
- y) Enter your Wireless@SG password in **Password** field
- z) Click **Options** → **Exit** to save

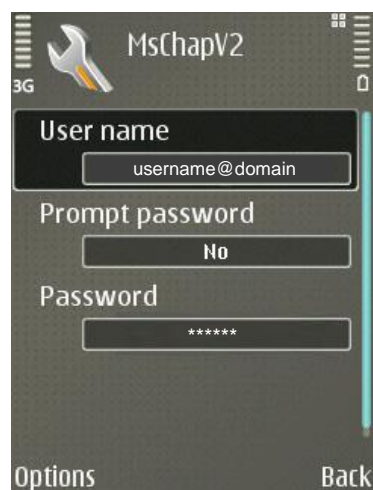

1.2 Connect to Wireless@SGx hotspot

- a) Upon the launch of the browser or any application that requires Internet access, a list of available access points will be listed.
- b) Select Wireless@SGx to connect.



2 Uninstall SSA profile

Follow the steps below to remove the configuration:

- a) Go to **Menu** → **Tools** → **Settings** → **Connections** → **Access Points**
- b) Select the Access Point named Wireless@SGx
- c) Select **Options**
- d) Select **Delete**
- e) Select **Yes** when prompted to confirm deletion